

4

3



2

1

D

D

C



C

B


B

A

A

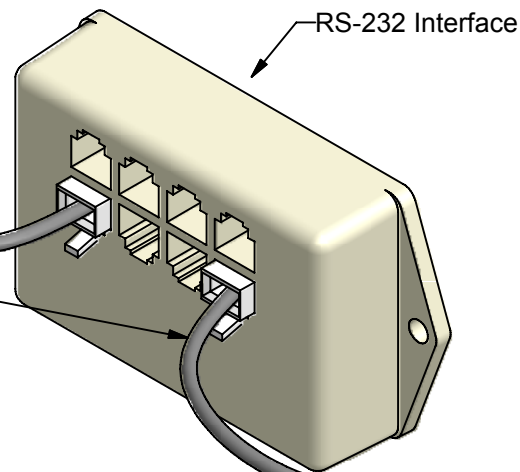
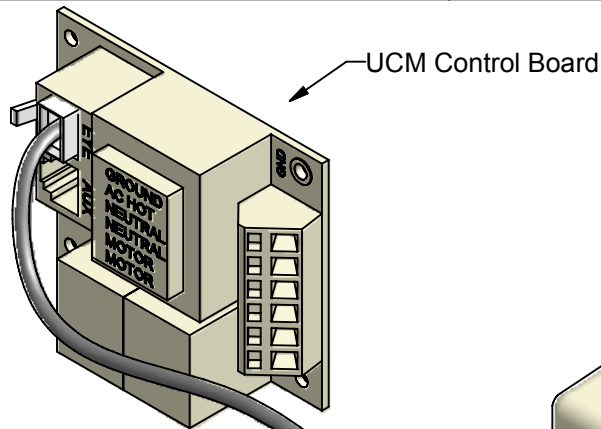


4-Conductor
26/4 Silver Satin
Low Voltage
Modular Wire

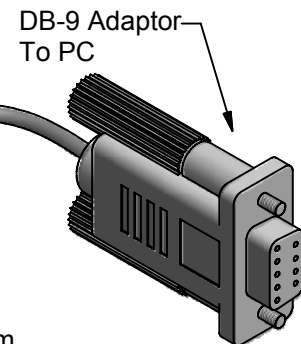

Colors MUST be in this order.

Black
Red
Green
Yellow

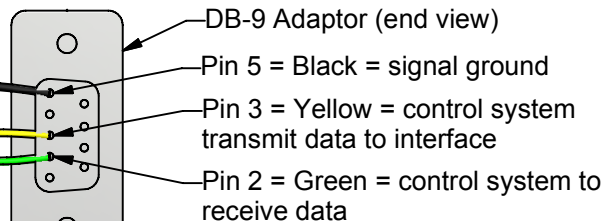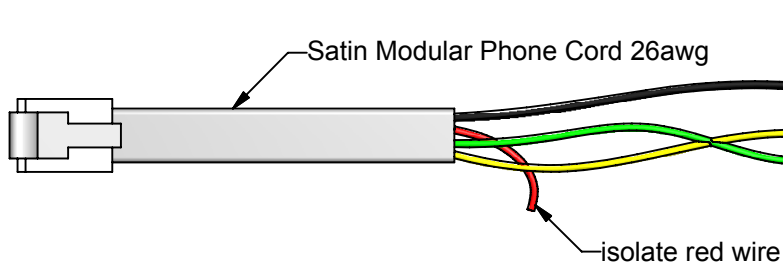

<p>CONFIDENTIAL</p> <p>All information disclosed in this document is proprietary to BTX Window Automation. Holder agrees to maintain it in confidence and must not replicate or reveal this information in any manner.</p>	Project	Wiring				BTX Window Automation 10763 Sanden Dr. Dallas, Texas 75238 (214) 340-2800 (214) 343-2444 FAX
	Dim					
	TOLERANCES		RS-232 to DB-9 Detail			
	.XX ± .015 .XXX ± .005 ANG ± 1°		Size	Matl:	Dwg No:	Rev
By: G. Bennett		Date: 23-June-06	Scale: 3/4	rs232_ucm_db9-1	1 of 1	

4

3



2

1